



周波数ステップ125kHz(9波)

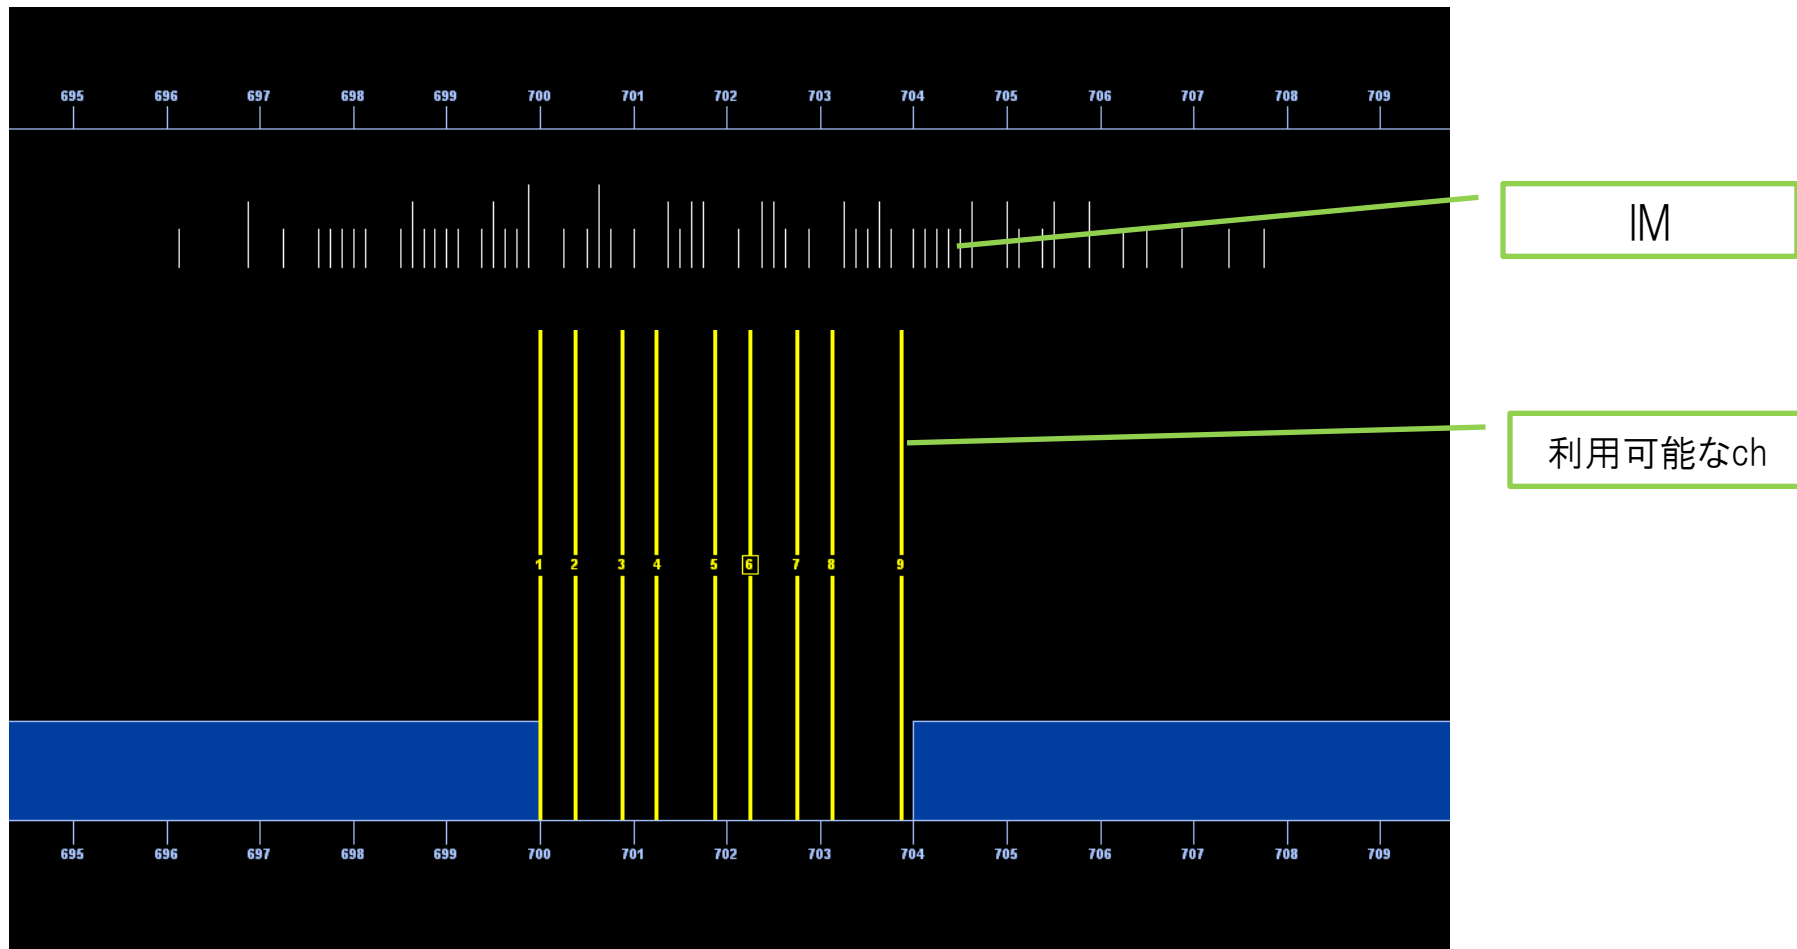


周波数ステップ25kHz(12波)

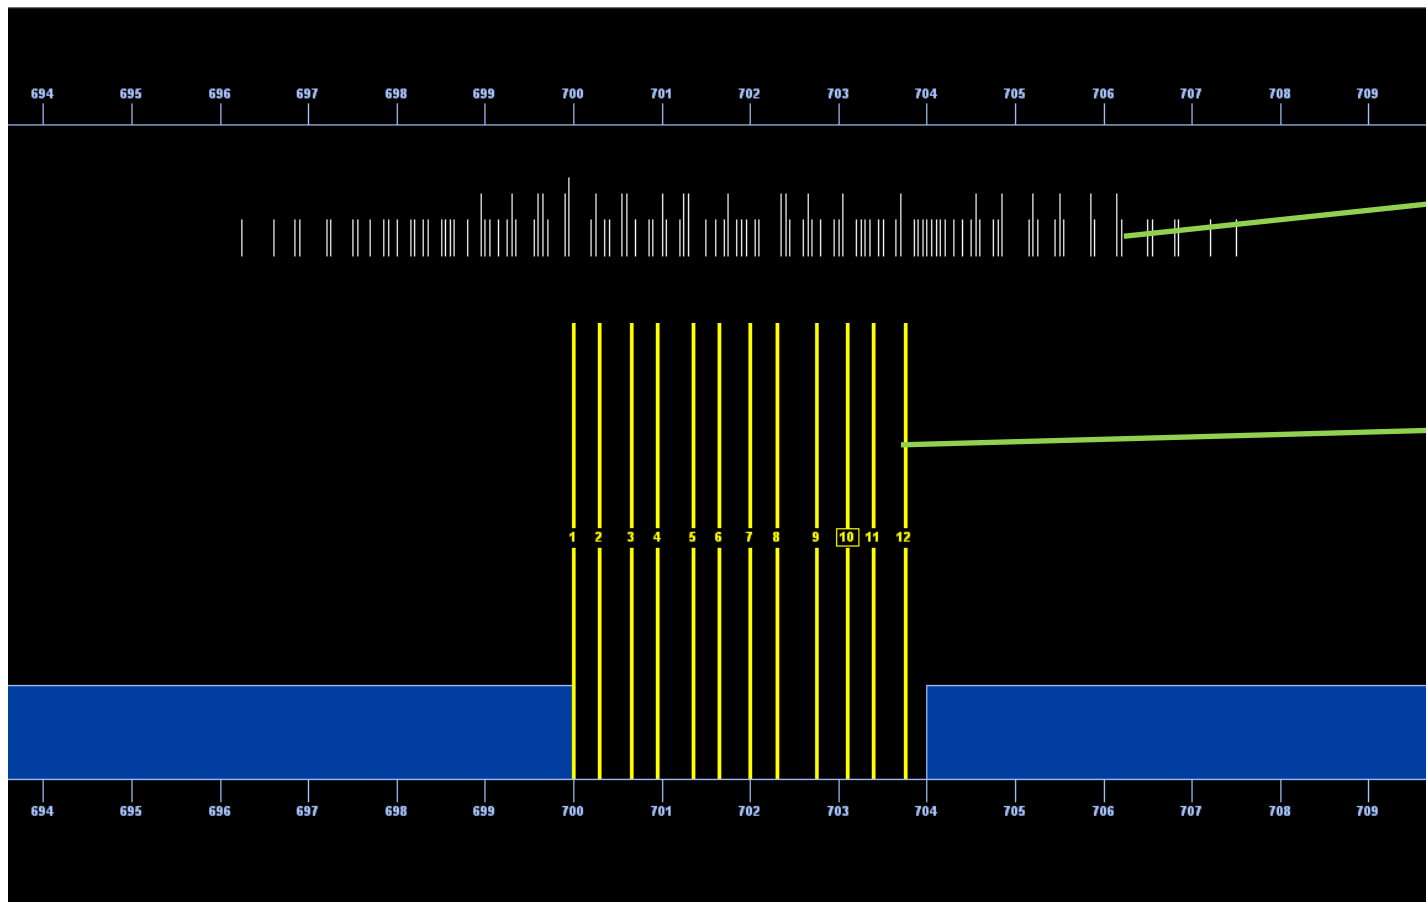

IM

利用可能なch

周波数ステップ5kHz(14波)

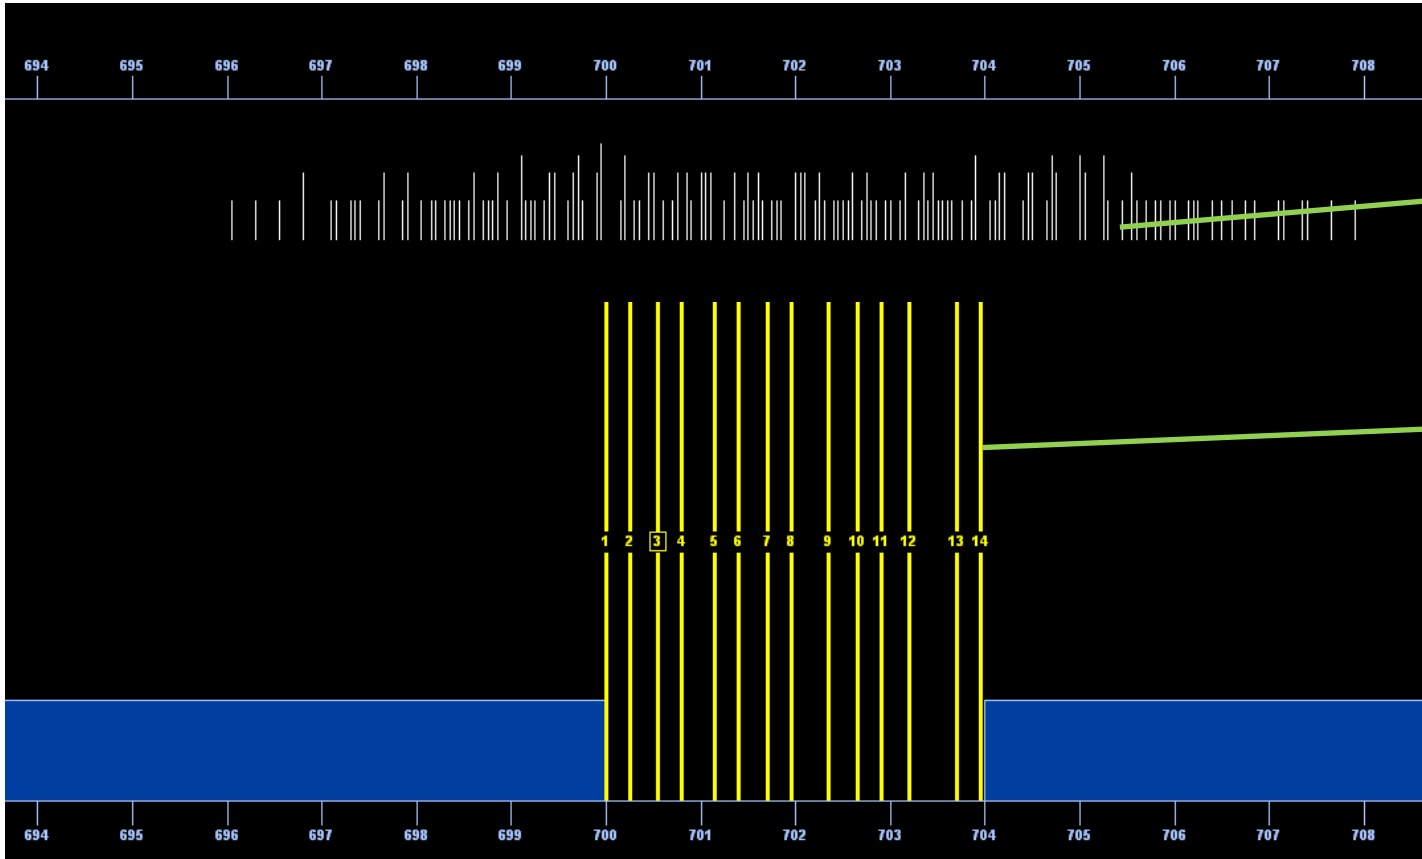

IM

利用可能なch

イメージ

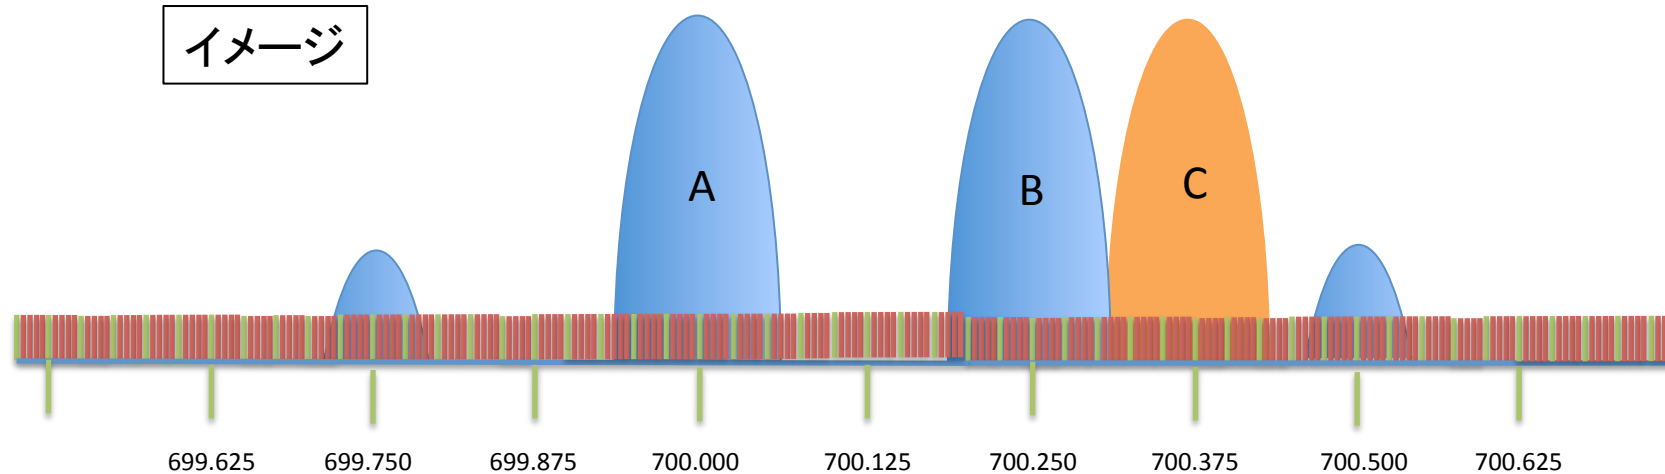


図1

第1のエリア： AとBを運用

第2のエリア： Cを運用

第1のエリアとの位置関係に考慮を要するが、同一のエリアではない場合

モデルとして700.000から700.500MHzに注目します。

図1は、Cを700.375MHzで運用すると干渉する場合があります。

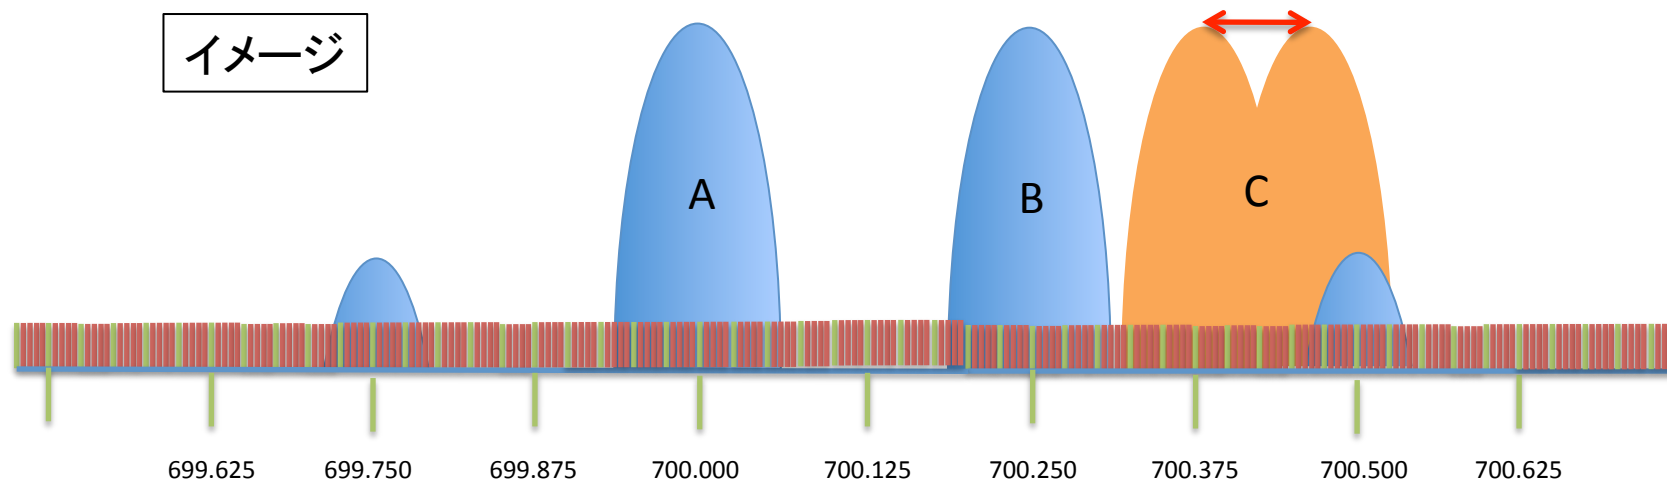


図2

第1のエリア： AとBを運用

第2のエリア： Cを運用

第1のエリアとの位置関係に考慮を要するが、同一のエリアではない場合

モデルとして700.000から700.500MHzに注目します。

図2に、700.375より上から700.475程度の範囲の運用の可能性を示します。
位置関係を考慮することで500kHz内で2波から3波へ増やすことができます。

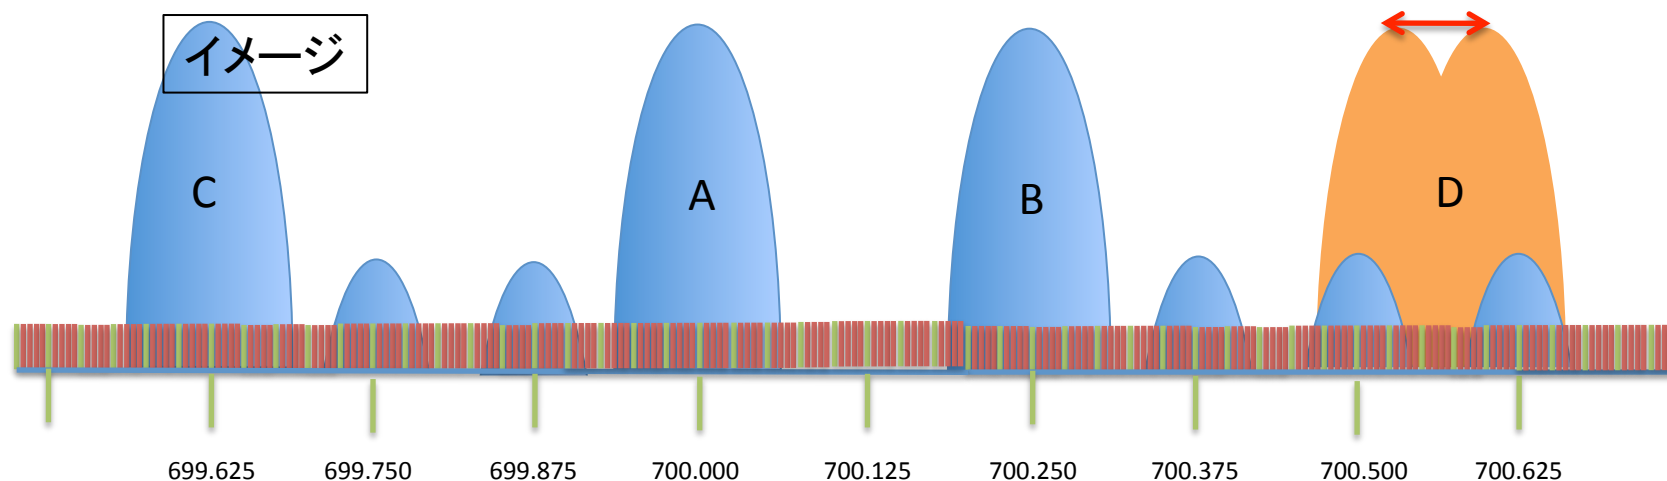


図3


ABCの運用に

Dの運用を追加する場合

モデルとして699.625から700.625MHzに注目します。

図3に、700.500より上で700.625より下の範囲の運用の可能性を示します。
この例では同一エリアで3波から4波に増やすことができます。

図は現行規定を基本にして考え方の一例を示したものです。
中心周波数等は仮定のものであります。


English

Private Audio
Professional Audio
Service & Support
Sennheiser Sound
Press
About Sennheiser
Home

Quickfinder

Professional Audio

Wireless Microphone Systems

Handheld transmitter

3000 / 5000 Series

2000 Series

ew 500 G3 Series

ew 300 G3 Series

ew 100 G3 Series

ew 100 G3 Series 1800 MHz

XS Wireless

freePORT

Bodypack Transmitter

Plug-on Transmitter

Receiver

Broadcast / ENG / Film

Monitoring

Wireless Instrument Systems

Lavalier Microphones

Headsets

Accessories

Wired Microphones

Conference Systems

Tour Guide Systems


Audiology Solutions

Aviation Headsets

Professional Headphones & Headsets

SKM 2000

General Description
Technical Data
Variants



[Zoom +](#)

General Description

It's all in the design. The hand-held transmitter of the 2000 series shows its strength: during use, in its performance, in its features. Sennheiser's technical know-how is shown through its switchable transmission power, intuitive menu navigation, an easy-to-read graphic display and external charging contacts for charging the optional rechargeable batteries directly. SKM 2000 is compatible with all ew capsules, including the MMK 965-1 true condenser capsule, whose wired version, e 965, has already proven to be a great success. Colors: Nickel and black

Features

- Rugged metal housing
- Up to 75 MHz switching bandwidth
- 20 fixed frequency bands with up to 64 compatible presets
- 6 banks each with up to 64 tunable channels
- Frequency setting in 25 kHz steps
- Pilot tone squelch for interference-free operation
- External charging contacts for recharging battery BA 2015 in the transmitter
- Backlit display on transmitter (keystroke activation)
- Auto-lock feature to prevent buttons from accidentally being pressed
- Audio and RF MUTE feature for muting the transmitter
- Transmitters can be configured from the receiver menu
- Possible to synchronize with the receiver using infrared interface
- Wide range of accessories for virtually any use

Delivery Includes

- 1 SKM 2000 hand-held transmitter
- 2 AA 1.5 V batteries
- 1 microphone clip
- 8 color-coded rings
- 1 instruction manual
- 1 supplementary frequency sheet
- 1 supplementary RF power sheet

[Print](#)
[Back](#)
[Top](#)

More Product Information


Product Downloads

- Instructions for use (5 MB)
- EC Declaration of Conformity (1 MB)
- Brochure 2000 Series (2 MB)
- Frequency sheet (280 KB)
- Frequency sheet (281 KB)
- Frequency sheet (281 KB)
- Frequency sheet (277 KB)
- Frequency sheet (235 KB)

Planning Files

Glossary


Media Control Protocol



Media Control Protocol for ew G3 and 2000 series

[more](#)


Contact Center



Do you have questions?

[more](#)

Social Media



[Contact](#) | [Privacy](#) | [Terms of Use](#) | [Sennheiser Worldwide](#) | [Business Net](#)

© 2012 Sennheiser electronic GmbH & Co. KG

Quickfinder

Professional Audio

Wireless Microphone Systems

Handheld transmitter

3000 / 5000 Series

2000 Series

ew 500 G3 Series

ew 300 G3 Series

ew 100 G3 Series

ew 100 G3 Series 1800 MHz

XS Wireless

freePORT

Bodypack Transmitter

Plug-on Transmitter

Receiver

Broadcast / ENG / Film

Monitoring

Wireless Instrument Systems

Lavalier Microphones

Headsets

Accessories

Wired Microphones

Conference Systems

Tour Guide Systems

Audiology Solutions

Aviation Headsets

Professional Headphones & Headsets

SKM 5200-II

General Description

Technical Data

Accessories

Variants



General Description

The SKM 5200-II is the next evolution of the SKM 5200 world class microphone. Robust, reliable and user-friendly, the professional hand-held transmitter is suitable for every conceivable type of recording and transmission situation. The mechanics, electronics and operating concept were designed to meet the highest requirements of live events.

This is why, for example, the SKM 5200-II now offers a switching bandwidth of up to 184 MHz. The "HiDyn plus™" noise suppression system developed by Sennheiser reduces RF noise to an absolute minimum, ensuring a wide dynamic range and crystal-clear sound. Programming is extremely flexible: the SKM-II 5200 has both a fixed and a variable channel bank. All parameters are shown on a backlit LCD; they can be locked to prevent accidental adjustment, and checked within seconds.

The SKM 5200-II is available in four frequency variants – L, N, N-US and P – as well as in three colors: black, nickel and steel blue (haematite). The hand-held transmitter is compatible with all capsules, battery and rechargeable battery compartments of the 5000 series as well as with Neumann microphone heads..

Features

- Up to 184 MHz switching bandwidth
- Low-intermodulation mode (LoI)
- Switchable output power
- Award-winning design
- Audio sensitivity adjustable in steps of 1 dB from -40 to 0 dB
- 2 AA batteries for at least 7 hrs of operating time
- Frequencies adjustable in steps of 5 kHz
- Convenient jog dial
- Switchable low-cut

Related Products



Print

Back

Top

More Product Information

Product Downloads

- Instructions for use (3 MB)
- EC Declaration of Conformity (1 MB)
- Frequenz-Blatt (180 KB)

Glossary

Contact Center



more

Social Media

